

**AQUARIUS PUMP COMPANY**

150 - 350 GPM

2 YH

200 - 425 Feet TDH

STANDARD SPECIFICATION**Discharge** - 2 inch threaded discharge**Suction** - 2.5 inch threaded suction**Impeller** - Enclosed cast iron**Volute** - Right hand tangential discharge, four positions**Mechanical Seal or Traditional Packing** - Single type 1 carbon ceramic mechanical seal: Cycloseal® design, Run-dry available**Footprint** - Matches Aquarius's historical 2Y**Materials of Construction**

- Cast iron bronze fitted
- Other materials available

**PURCHASE OPTIONS**

- **Complete Pump**
 - Fully assembled at the factory
 - Ready to go to the field
- **Pump End Kit**
 - Finished components
 - PrePainted
 - Easy assembly
 - Common tools
 - Simple instructions
 - Obtain drives locally or through Aquarius

MOUNTING OPTIONS

- **Close Coupled Electric**
 - Standard JP motor shaft
 - Standard Efficiency
 - Aquarius's Energy Efficient Design
- **Frame Mount**
 - Aquarius F5
 - Aquarius F85
- **Engine Bracket**
 - Aquarius EM5 (SAE 5)
 - Aquarius EM309 (SAE 5)
 - Aquarius EM85 (SAE 3 & 4)

FEATURES & BENEFITS


- **Aquarius's Tradition of Excellence:**
 - **Highest Quality Products**
 - **Experience**
 - Over 50 years in the centrifugal pump business
 - **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
 - **Strong Local Dealer Support**
 - Our agricultural products are sold only through authorized dealerships
 - Dealerships provide full service to customers from sales to replacement parts
 - Dealers maintain and improve their knowledge at educational activities like Aquarius's "Pump School"
- **Economically Priced:**
 - **Component Design**
 - Efficient manufacturing through increased volume of common parts
 - **Versatility**
 - The ability to mix and match components reducing local inventory of both parts and wholegoods with a wide variety of pumps and mounting configurations for the customer
- **Exceptional Design:**
 - **Efficiency**
 - Effectively converts energy into fluid flow and pressure
 - **Long Product Life**
 - Thick walled castings
 - Heavy duty shafts
 - 20,000 hour bearings
 - Replaceable wear rings and shaft sleeves
 - Reduced thrust load through design and balance lines where appropriate

PERFORMANCE CURVES

2 YH
3600 RPM

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
3525	VARIOUS	ENCLOSED	.31"	900	2.5"	2"	6

SINGLE VOLUTE MOUNTING CONFIG: CC, VM, F, VF, EM, VC

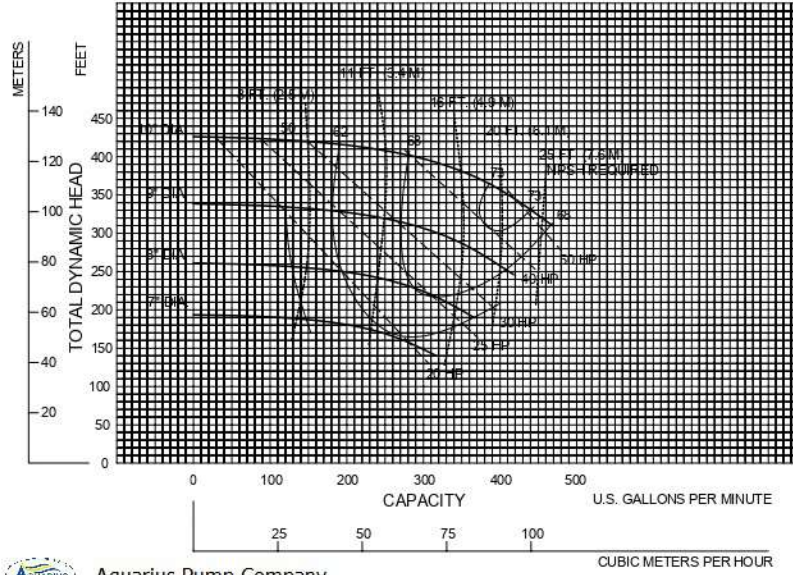

Performance shown is for cast water. Other coupled media configurations with solids. Other mounting styles or fluids may require horsepower and/or performance adjustments.



Aquarius Pump Company

Note:
Curves also available in 1800 and various RPM

012304

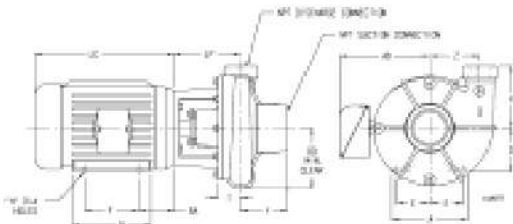


Figure 1

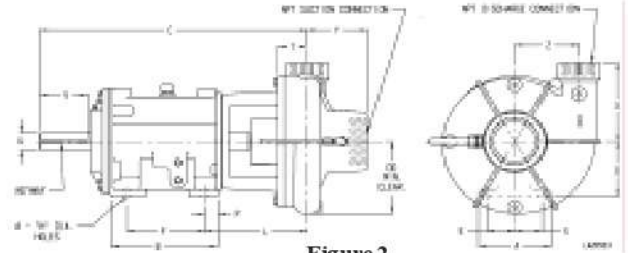


Figure 2


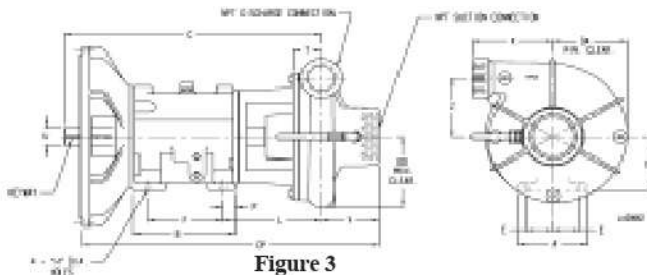


Figure 3



PUMP DIMENSIONS

MOUNT	AK	Fig.	A	B	C	CP	D	DA	DD	E	F	H	L	P	T	U	V	X	Y	Z	LP	KEYWAY
CC	4.5	1	-	-	-	-	-	-	6.62	-	-	-	-	-	3.15	-	-	5.75	4	5.75	7.19	-
	8.5	1	-	-	-	-	-	-	6.62	-	-	-	-	-	3.15	-	-	5.75	4	5.75	8	-
	12.5	1	-	-	-	-	-	-	6.62	-	-	-	-	-	3.15	-	-	5.75	4	5.75	8	-
F5	-	2	7.5	7.36	18.62	-	5.5	-	6.62	2.62	4.5	0.56	8.78	1.44	-	1.25	3	5.75	4	5.75	-	.25 x .12
F85	-	2	6.5	9.52	24.45	-	5.25	-	6.62	2.5	7	0.69	9.72	1.16	3.15	2	4.81	5.75	4	5.75	-	.50 X .25
EM5	-	-	7.5	7.36	18.62	22.25	5.5	8.25	6.62	2.62	4.5	0.56	8.78	1.44	-	1.25	-	5.75	4	5.75	-	.25 X .12
EM85	-	-	6.5	9.52	24.45	27.09	5.25	6.62	6.62	2.5	7	0.69	9.72	1.16	3.15	2	-	5.75	4	5.75	-	.50 X .25
EM309	-	-	-	-	18.23	20.86	-	-	6.38	-	-	-	-	-	3.15	1.25	-	6.5	3.47	5.5	-	.25 X .12

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
143-5	4.5	6.5	5.94	3.5	2.75	5	0.34	5.62	2.88	10
182-3	4.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
	8.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.5	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.5	11.3	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.6	12.2	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.6	13.2	6.1	24.31
404-5	12.5	18.5	16.62	10	8	13.75	0.8	16.3	6.8	29.97

Aquarius Pump Company

ISO9001:2000 CERTIFIED