



AQUARIUS PUMP COMPANY

4SP

AVAILABLE MOUNTING CONFIGURATIONS

4STH-F FRAME MOUNT
4STH-EM ENGINE MOUNT

OPERATING LEVELS

MIN FLOW	175 GPM	39.75 m ³ /h
MAX FLOW	2000 GPM	454.25 m ³ /h
DISCHARGE SIZE	4"	102 mm
SUCTION SIZE	6"	152 mm
SOLIDS HANDLING	3"	76 mm
MAX SPEED	2100 RPM	2100 RPM
SHUT-OFF HEAD	225'	68.58 m
BEP HEAD	156'	47.55 m
BEP FLOW	1325 GPM	300.94 m ³ /h
BEP PERCENT	60%	60%



A typical picture of the pump is shown. Please contact Aquarius Pump Company for further details. All information is approximate and for general guidance only.

HIGH-HEAD SELF-PRIMER

Aquarius's self-priming pump, with industry-leading efficiency, runs several percentage points higher than other manufacturers. Features patented Cycloseal[®] system and uniquely designed volute for best performance, with a 6" suction and 4" discharge.

- 5-year warranty, optional self-cleaning wear plate
- Modular bearing frame
- Aquarius's Cycloseal with type 2 seal
- Dual protection of bearings with external seal leakage monitor (vent to atmosphere)
- Retrofit-able with existing installations

- High Efficiency Design
- Oversized oil reservoir for better cooling
- Replaceable shaft sleeve
- Heavy-duty ductile iron construction
- Designed for SAE conversion
- High RPM Capability



AGRICULTURE



FOOD



INDUSTRIAL



MINING



MUNICIPAL



OIL & GAS



REFRIGERATION




RENTAL



AQUARIUS PUMP COMPANY

4SP

Performances shown are for S.G. 1.0 80°F water, frame mounted configuration with cydoseal. Other mounting styles or S.G. may require curve adjustments.	Speed	Impeller Dia.	Style	Volute	Solids Dia.	Ns	Suction	Discharge	No. Vanes
	VARIOUS	12.38"	SEMI-OPEN	SINGLE	3"	1715	6"	4"	2

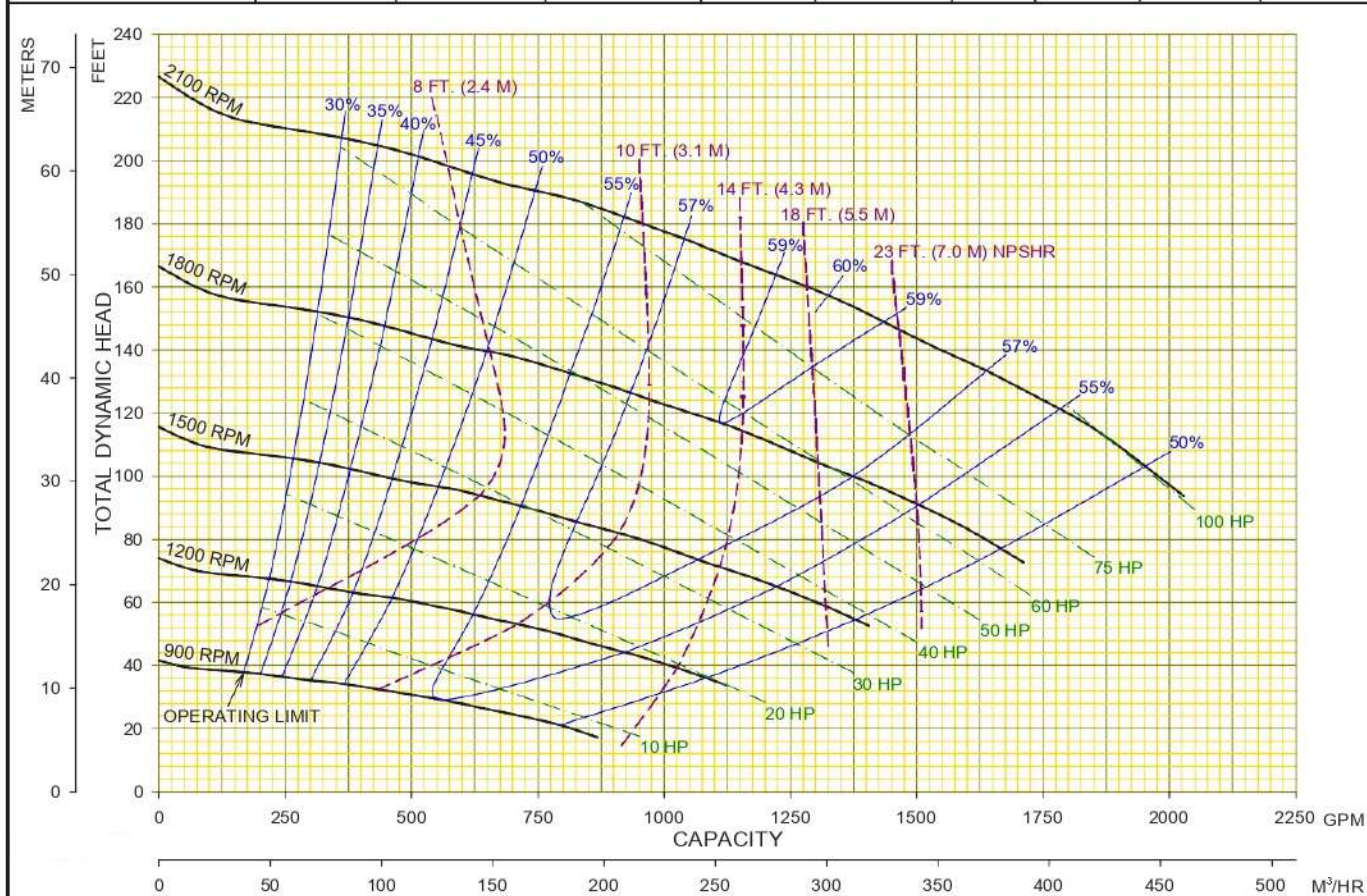

Aquarius Pump Company	00	09/08/14	CTG	MODEL : 4STH	CURVE NO. 4STHVA
	00	09/08/14	CTG	TYPE :SELF-PRIMER	