

**AQUARIUS PUMP COMPANY**

100 - 400 GPM

3 YH

75 - 200 Feet TDH

STANDARD SPECIFICATION**Discharge** - 3 inch flanged discharge**Suction** - 4 inch flanged suction**Balance Line** - Stainless steel flexible line**Impeller** - Enclosed cast iron**Volute** - Right hand tangential discharge, four positions**Mechanical Seal or Traditional Packing** - Single type 1 carbon ceramic mechanical seal: Cycloseal® design, Run-dry available**Footprint** - Matches Aquarius's historical 3YB**Materials of Construction**

- Cast iron bronze fitted
- Other materials available

PURCHASE OPTIONS

- **Complete Pump**
 - Fully assembled at the factory
 - Ready to go to the field
- **Pump End Kit**
 - Finished components
 - PrePainted
 - Easy assembly
 - Common tools
 - Simple instructions
 - Obtain drives locally or through Aquarius

MOUNTING OPTIONS

- **Close Coupled Electric**
 - Standard JP motor shaft
 - Standard Efficiency
 - Aquarius's Energy Efficient Design
- **Frame Mount**
 - Aquarius F85
- **Engine Bracket**
 - Aquarius EM309 (SAE 5)
 - Aquarius EM85 (SAE 3 and 4)


**FEATURES & BENEFITS**

- **Aquarius's Tradition of Excellence:**
 - **Highest Quality Products**
 - **Experience**
 - Over 50 years in the centrifugal pump business
 - **Optimum Hydraulics**
 - In house engineering staff and test lab facilities
 - **Strong Local Dealer Support**
 - Our agricultural products are sold only through authorized dealerships
 - Dealerships provide full service to customers from sales to replacement parts
 - Dealers maintain and improve their knowledge at educational activities like Aquarius's "Pump School"
- **Economically Priced:**
 - **Component Design**
 - Efficient manufacturing through increased volume of common parts
 - **Versatility**
 - The ability to mix and match components reducing local inventory of both parts and wholegoods with a wide variety of pumps and mounting configurations for the customer
- **Exceptional Design:**
 - **Efficiency**
 - Effectively converts energy into fluid flow and pressure
 - **Long Product Life**
 - Thick walled castings
 - Heavy duty shafts
 - 20,000 hour bearings
 - Replaceable wear rings and shaft sleeves
 - Reduced thrust load through design and balance lines where appropriate

PERFORMANCE CURVES

3 YH
3600 RPM

Speed	Impeller Dia.	Style	Solids Dia.	N _S	Suction	Discharge	No. vanes
3540	VARIOUS	ENCLOSED	.5"	1225	4"	3"	6

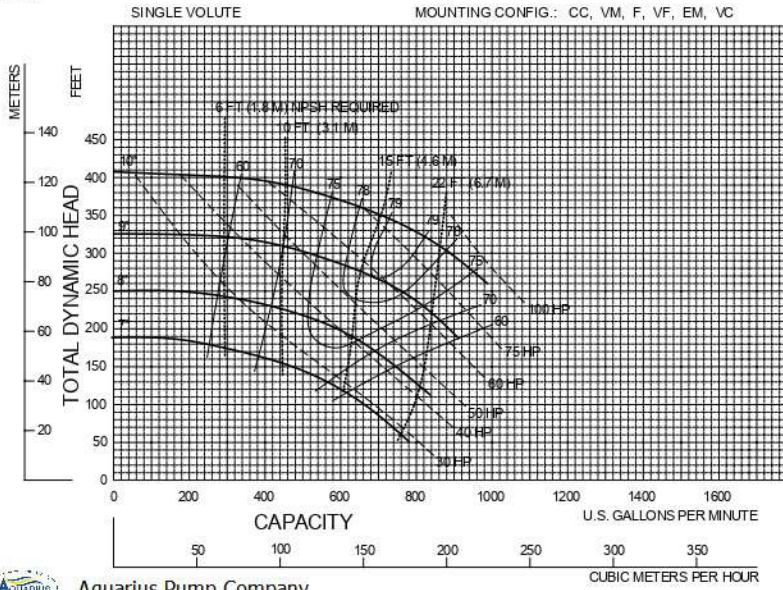

Performances shown are for cool water, close coupled electric configuration with Cyclotest. O curves are for performance at various temperatures and/or performance at various altitudes.



Aquarius Pump Company

Note:
Curves also available in 1800 and various RPM

012301

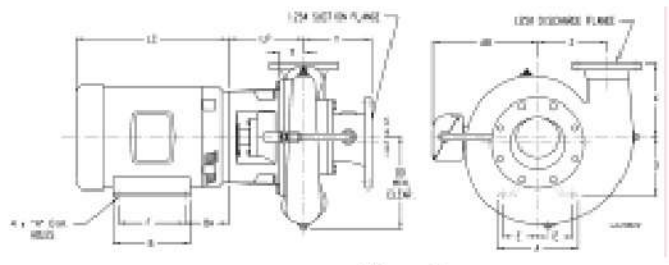


Figure 1

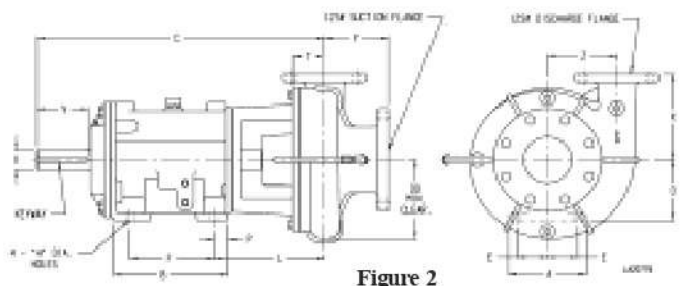


Figure 2


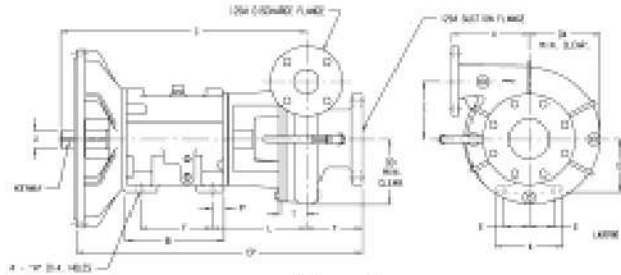


Figure 3



PUMP DIMENSIONS

MOUNT	AK	Fig.	A	B	C	CP	D	DA	DD	E	F	H	L	P	T	U	V	X	Y	Z	LP	KEYWAY
CC	8.5	1	-	-	-	-	-	-	7.39	-	-	-	-	-	2.59	-	-	7	5.38	6.5	7.44	-
	12.5	1	-	-	-	-	-	-	7.39	-	-	-	-	-	2.59	-	-	7	5.38	6.5	7.44	-
F85	-	2	6.5	9.52	24.28	-	5.25	-	7.39	2.5	7	0.69	9.19	1.16	2.59	2	4.81	7	5.38	6.5	-	.50 X .25
EM85	-	3	6.5	9.52	24.28	27.66	5.25	7.39	7.38	2.5	7	0.69	9.19	1.16	2.59	2	-	7	5.38	6.5	-	.50 X .25
EM309	-	-	-	-	17.67	21.68	-	-	7.39	-	-	-	-	-	2.59	1.25	-	7	5.38	6.5	-	.25 X .12

MOTOR DIMENSIONS

MOTOR FRAME	AK DIM.	A	B	D	E	F	H	AB	BA	LC
143-5	4.5	6.5	5.94	3.5	2.75	5	0.34	5.62	2.88	10
182-3	4.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
	8.5	8.62	6.5	4.5	3.75	5.5	0.41	6.75	3.5	12.25
213-5	8.5	9.5	8	5.25	4.25	7	0.41	7.94	4.5	13.69
254-6	8.5	11.25	11.25	6.25	5	10	0.53	9.5	5	17.94
284-6	12.5	12.25	12.25	7	5.5	11	0.53	11.37	5	21.31
324-6	12.5	14.25	13.75	8	6.25	12	0.66	12.22	5.5	22.19
364-5	12.5	15.75	14	9	7	12.25	0.66	13.2	6.12	24.31
404-5	12.5	18.5	16.62	10	8	13.75	0.81	16.39	6.88	29.97

Aquarius Pump Company

ISO9001:2000 CERTIFIED